

**PVDF-BASED COATINGS VERSUS  
POLYESTER POWDER AND OTHER COATINGS**

# Case Studies in Performance

**NO FADING**

**NO CHALKING**

**COLOR RETENTION**

**GLOSS RETENTION**

*Test Panels on Exposure at Arkema's Sub-Tropical Exposure Station*

# THE TRUTH IS ON THE TEST FENCE.

Metal has rapidly become the material of choice for exterior use due to its rugged durability, design versatility and aesthetic possibilities. However, for all its bravado and beauty, metal doesn't necessarily have a tough skin and is only available in a single color. To be both functional and decorative, metal must be coated with a finish that beautifies with color and doesn't chalk; that won't lose its color and sheen; that won't pit, chip or age before its time.

Kynar 500® resin-based finishes are available worldwide through a strict licensing program. This licensed distribution ensures the quality, consistency and high performance of Kynar 500® resin-based coatings.

## PERFORMANCE TESTING

### Objective

To measure and compare the performance of Kynar 500® resin-based coating systems with competitive coatings for their resistance to weather.


### Background

Panels coated with liquid Kynar 500® resin-based coatings and powder coated with other resin systems were exposed on a South Florida test fence for 10 to 17 years. The panels were evaluated periodically during exposure for chalk, gloss and color changes. See table below.


### Conclusion



Kynar 500® resin-based coatings outperform polyester powder, urethane, silicone polyester and acrylic coatings in every category: better color retention, better resistance to chalking. The proof is in the pictures of the coated panels. Just compare the unexposed portion (top panels) with the exposed portion (bottom panels). Performance as promised. Time after time. Kynar 500® resin-based coatings.

## FLORIDA EXPOSURE 45° SOUTH. 17 YEARS EXPOSURE.

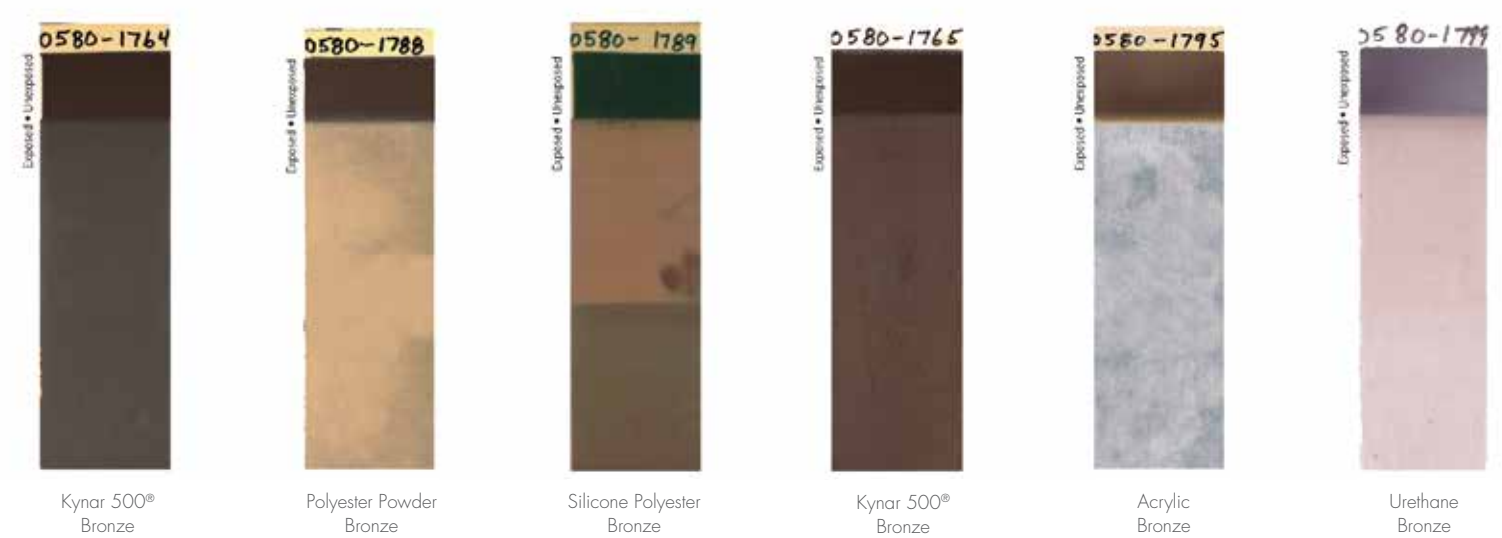

## FLORIDA EXPOSURE 45° SOUTH. 10 YEARS EXPOSURE.

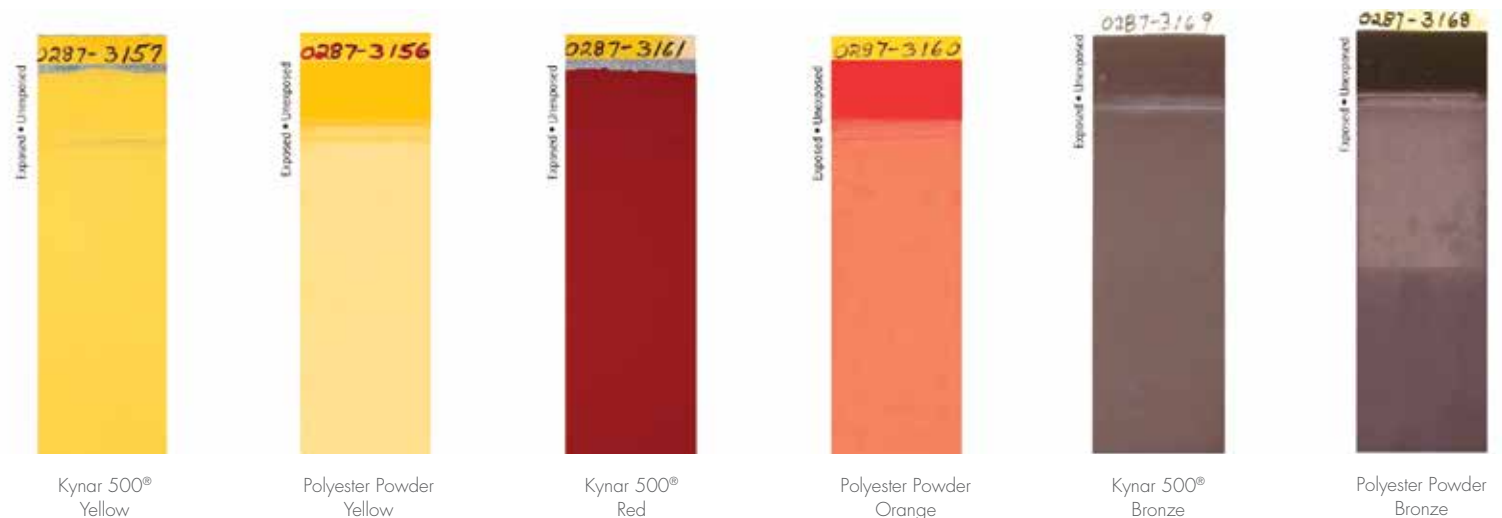

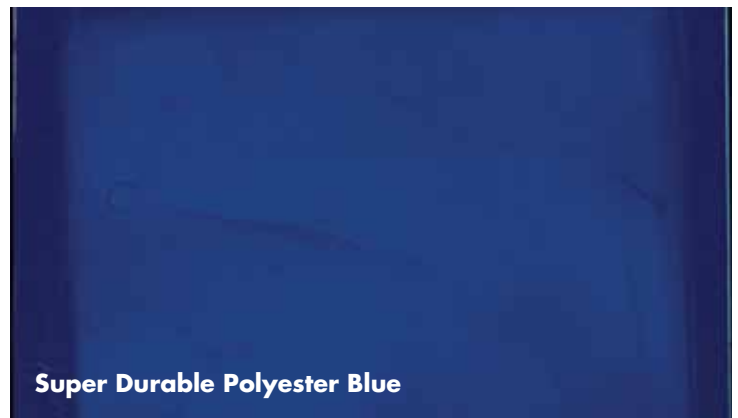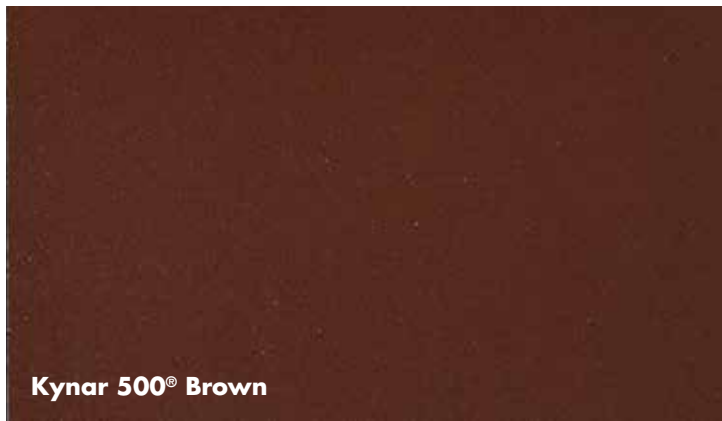

Kynar 500®-based coatings are typically solvent-based, but are often confused with powder coatings through the following question, “How does a Kynar 500®-based coating compare to a powder coating?” The easiest answer is that all coating systems, whether liquid or powder, contain a specific resin that acts as the first line of defense against weathering. Ultimately, the resin determines the durability. Kynar 500®-based coating is simply a resin commonly known as polyvinylidene fluoride. Other coating resins include acrylic, polyester, silicone polyester and urethane. In today’s market, liquid Kynar 500®-based coatings are the most common, but Kynar 500®-based coating is also available as

a powder coating. Whether you are looking for a liquid coating or a powder coating, the key to product performance is the resin chemistry. For the ultimate long-term durability, time has shown Kynar 500® PVDF resin is the one to choose.

In color-matched accelerated weathering tests, shown above, Kynar 500®-based coating panels clearly outperformed the latest “super durable polyester” powder technology. Contact us at [www.kynar500.com](http://www.kynar500.com) for more information on Kynar 500®-based coatings.

PANEL NO.	DESCRIPTION	EXPOSURE TIME	ORIGINAL GLOSS 60°	FINAL GLOSS 60°	COLOR CHANGE	CHALK (EXPOSED) ASTMD-4214
1764	Kynar 500®, Bronze	17 years	31	8	6.71	8
1788	Silicone Polyester, Bronze	17 years	44	1	27.06	4
1789	Silicone Polyester, Bronze	17 years	34	1	36.11	4
1765	Kynar 500®, Bronze	17 years	30	10	8.74	8
1795	Acrylic, Bronze	17 years	26		coating worn to substrate	
1799	Urethane, Bronze	17 years	36	1	38.26	6
3157	Kynar 500®, Yellow	10 years	15	15	5.35	10
3156	Polyester Powder, Yellow	10 years	28	3	23.37	6
3161	Kynar 500®, Red	10 years	52	36	8.77	10
3160	Polyester Powder, Orange	10 years	34	1	24.66	6
3169	Kynar 500®, Bronze	10 years	43	22	4.79	10
3168	Polyester Powder, Bronze	10 years	38	1	10.91	6

## CASE STUDY: TAIYO STEEL

In 1981 in Funabashi Japan, Taiyo Steel Co., Ltd. built a plant for their new coil coating line employing metal walls. A decision was made to make the south wall an industrial test fence, to evaluate the outdoor weatherability of Taiyo Steel's pre-coated metal products. Ten meter high steel panels were coated with acrylic, polyester, silicone polyester and Kynar 500® resin-based coatings.

In just two short years, there was a significant difference in color retention, gloss retention and chalk resistance between Kynar 500® resin-based coatings and other systems.

After fourteen years, the Kynar 500® resin-based coating was the only system that kept its original appearance, clearly outperforming the other coatings year-in and year-out.



## CONTACT US AROUND THE WORLD

Arkema Inc.  
900 First Ave  
King of Prussia, PA 19406  
800-KYNAR-500

Arkema  
420 rue Estienne d'Orves  
92705 Colombes Cedex France  
(+33) (0) 1 49 00 80 80

Arkema  
Ruby House, B Wing, 2nd Floor  
J. K. Sawant Marg  
Dadar (w), Mumbai 400 028  
India  
Tel: 91 22 2438 7500  
Fax: 91 22 2438 7550

Arkema  
Unit 2801-06,  
Hong Kong Plaza  
283 Huai Hai Road (M)  
Shanghai 200021, P.R. China  
86-21-6386-3028

Arkema K.K.  
Fukoku Seimei Bldg 15F  
2-2-2 Uchisaiwaicho  
Chiyoda-Ku  
Tokyo 100-011, Japan  
81-3-5251-9665

Arkema  
11F, Oriental Chemical Building  
50, Sogong-dong  
Jung-gu, Seoul, 110-718, Korea  
82-2-3703-6822

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN.

The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement. See SDS for Health & Safety Considerations. Arkema has implemented a Medical Policy regarding the use of Arkema products in Medical Devices applications that are in contact with the body or circulating bodily fluids: (<http://www.arkema.com/en/social-responsibility/responsible-product-management/medical-device-policy/index.html>).

Arkema has designated Medical grades to be used for such Medical Device applications. Products that have not been designated as Medical grades are not authorized by Arkema for use in Medical Device applications that are in contact with the body or circulating bodily fluids. In addition, Arkema strictly prohibits the use of any Arkema products in Medical Device applications that are implanted in the body or in contact with bodily fluids or tissues for greater than 30 days. The Arkema trademarks and the Arkema name shall not be used in conjunction with customers' medical devices, including without limitation, permanent or temporary implantable devices, and customers shall not represent to anyone else, that Arkema allows, endorses or permits the use of Arkema products in such medical devices. It is the sole responsibility of the manufacturer of the medical device to determine the suitability (including biocompatibility) of all raw materials, products and components, including any medical grade Arkema products, in order to ensure that the final end-use product is safe for its end use; performs or functions as intended; and complies with all applicable legal and regulatory requirements (FDA or other national drug agencies) It is the sole responsibility of the manufacturer of the medical device to conduct all necessary tests and inspections and to evaluate the medical device under actual end-use requirements and to adequately advise and warn purchasers, users, and/or learned intermediaries (such as physicians) of pertinent risks and fulfill any postmarket surveillance obligations. Any decision regarding the appropriateness of a particular Arkema material in a particular medical device should be based on the judgment of the manufacturer, seller, the competent authority, and the treating physician.

Kynar®, Kynar 500® and FSF® are a registered trademark of Arkema Inc.

© 2015 Arkema Inc. All rights reserved.

**ARKEMA**  
INNOVATIVE CHEMISTRY

[www.kynar500.com](http://www.kynar500.com)

Arkema Inc.  
900 First Avenue  
King of Prussia, PA 19406  
USA  
Tel.: (+1) 610-205-7000

Headquarters: Arkema France  
420, rue d'Estienne d'Orves  
92705 Colombes Cedex – France  
Tel.: +33 (0)1 49 00 80 80  
Fax: +33 (0)1 49 00 83 96  
[arkema.com](http://arkema.com)